


PRODUKTINFORMATION

PERMETER AIR


KAMINANSLUTNING



INT Ø MM
EXT Ø MM
ØD1 MM

150
250
200


TILLUFTSKANAL
JUSTERBAR 1-1,8M

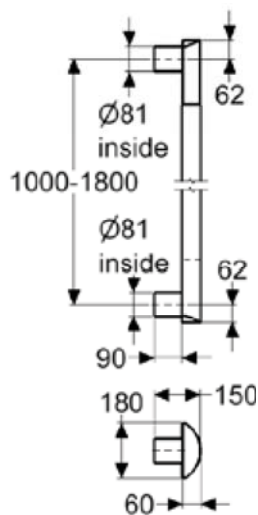

INT Ø MM
EXT Ø MM
ØD1 MM

150
250
200

TILLUFTSKANAL
JUSTERBAR 1,8-27M

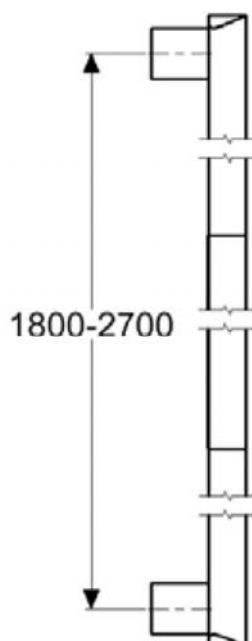

INT Ø MM
EXT Ø MM
ØD1 MM

150
250
200

FLEXSLANG FÖR
TILLUFT MED
LÅSBAND Ø80




INT Ø MM

80

EXT Ø MM

TILLUFTSÖVERGÅNG
80-65MM

Ø65
inside



INT Ø MM

150

EXT Ø MM


250

ØD1 MM

200

TILLUFTSÖVERGÅNG
80-82MM

Ø82 inside Ø80 outside



INT Ø MM

150

EXT Ø MM


250

ØD1 MM

200

TILLUFTSÖVERGÅNG
80-106MM

Ø106 inside Ø80 outside



INT Ø MM

150


EXT Ø MM

250

ØD1 MM

200

SKORSTENSLÄNGD
1000MM (955MM)

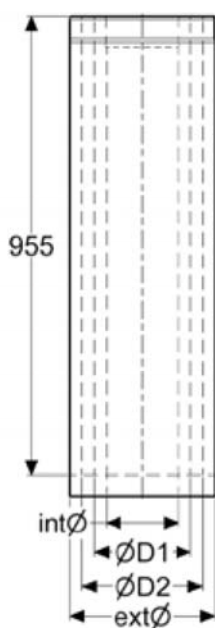

INT Ø MM

150

PM25 EXT Ø MM

250

PM50 EXT Ø MM

300


ØD1 MM

200

PM50 ØD2 MM


250

SKORSTENSLÄNGD
500MM (455MM)

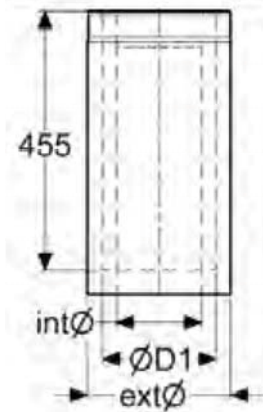


INT Ø MM	150
PM25 EXT Ø MM	250
PM50 EXT Ø MM	300
ØD1 MM	200
PM50 ØD2 MM	250

SKORSTENSLÄNGD
250MM (205MM)




INT Ø MM	150
PM25 EXT Ø MM	250
PM50 EXT Ø MM	300
ØD1 MM	200
PM50 ØD2 MM	250

JUSTERBAR LÄNGD
250-310MM




INT Ø MM	150
EXT Ø MM	250

TÄCKPLÅT RUND




INT Ø MM	150
PM25 EXT Ø MM	250
PM50 EXT Ø MM	300
PM25 ØA	457
PM25 ØB	258
PM50 ØA	507
PM50 ØB	308

TÄCKPLÅT 0-5°




INT Ø MM	150
PM25 EXT Ø MM	250
PM50 EXT Ø MM	300
PM25 A	500
PM25 B	275
PM25 C	120.5
PM25 D	259
PM50 A	550
PM50 B	300
PM50 C	120.5
PM50 D	309

TÄCKPLÅT 6-20°




INT Ø MM	150
PM25 EXT Ø MM	250
PM50 EXT Ø MM	300
PM25 A	500
PM25 B	275
PM25 C	120.5
PM25 D	259
PM50 A	550
PM50 B	300
PM50 C	120.5
PM50 D	309

TÄCKPLÅT 21-35°



INT Ø MM	150
PM25 EXT Ø MM	250
PM50 EXT Ø MM	300
PM25 A	500
PM25 B	290
PM25 C	120.5
PM25 D	259
PM50 A	550
PM50 B	320
PM50 C	120.5
PM50 D	309

TÄCKPLÅT 36-45°



INT Ø MM	150
PM25 EXT Ø MM	250
PM50 EXT Ø MM	300
PM25 A	500
PM25 B	315
PM25 C	120.5
PM25 D	259
PM50 A	550
PM50 B	345
PM50 C	120.5
PM50 D	309

RÖRBÖJ 15°




INT Ø MM	150
PM25 EXT Ø MM	250
PM50 EXT Ø MM	300

RÖRBÖJ 30°




INT Ø MM	150
PM25 EXT Ø MM	250
PM50 EXT Ø MM	300

RÖRBÖJ 45°



INT Ø MM	150
PM25 EXT Ø MM	250
PM50 EXT Ø MM	300
ØD1 MM	200
PM50 ØD2 MM	250
PM25 A	67
PM25 B	157
PM50 A	110
PM50 B	172

L-RÖR




INT Ø + INTØ1	150
EXT Ø + EXTØ1	300

■ Gäller för samtliga dimensioner

■ Gäller för Perimeter 25 (halvisolerad)


■ Gäller för Perimeter 50 (helisolerad)

INSPEKTIONSLÄNGD
455MM




INT Ø MM	150
PM25 EXT Ø MM	250
PM50 EXT Ø MM	300
A	455
B	500

REGNHATT Ø150



INT Ø MM	150
EXT Ø1 MM	300
EXT Ø2 MM	350
Ød MM	149
ØD1 MM	350
ØD2 MM	400
A	230

TÄCKLOCK AVSLUT
Ø150



INT Ø MM	150
EXT Ø MM	300